



airGateway™ **INSTALLER**

Wi-Fi Provisioning Gateway

Model: AG-PRO-INS

Quickly Provisions airMAX® CPE Devices


Optional Power by Mobile Power Pack

Durable Rubber Casing

airGateway™ INSTALLER

Wi-Fi Provisioning Gateway

The durable airGateway™ Installer should be in every WISP installer's toolbox. The AG-PRO-INS makes installing consumer premises equipment (CPE) easier and more efficient. Position, provision, and configure the CPE at the point of installation using a tablet or smartphone.

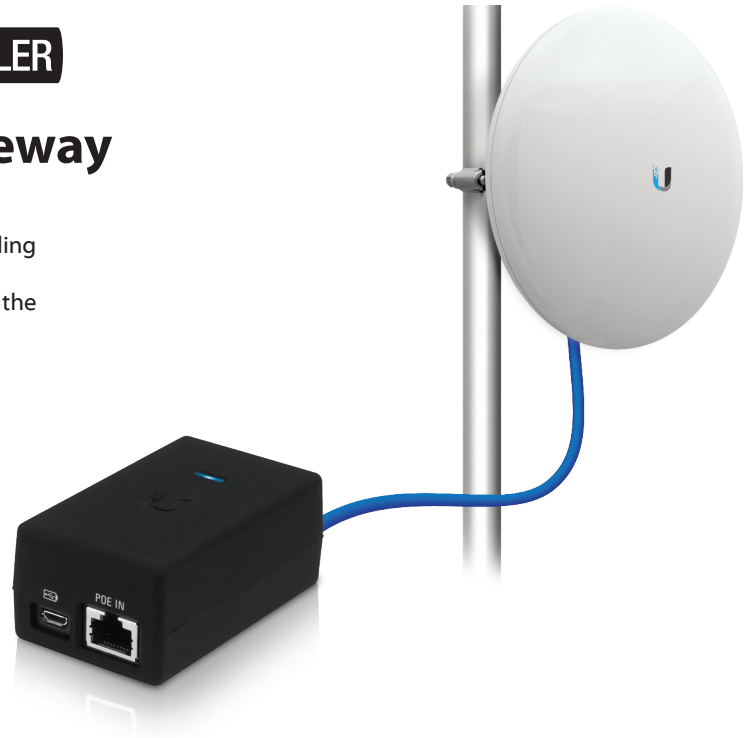

Mobile Device-Friendly Installation


The AG-PRO-INS provides dual-band Wi-Fi connectivity to mobile devices or laptops without Ethernet capability. This allows you to use a tablet or smartphone to access the CPE's web UI during installation so provisioning and final adjustments may be made at the point of installation.



Optional Power by Battery

The AG-PRO-INS may be powered by an optional mobile power pack so provisioning may be completed before the PoE connection is established.

The power pack must be 5V, 2A minimum in order to power the AG-PRO-INS and the CPE, and have a male micro-USB Type B connector.

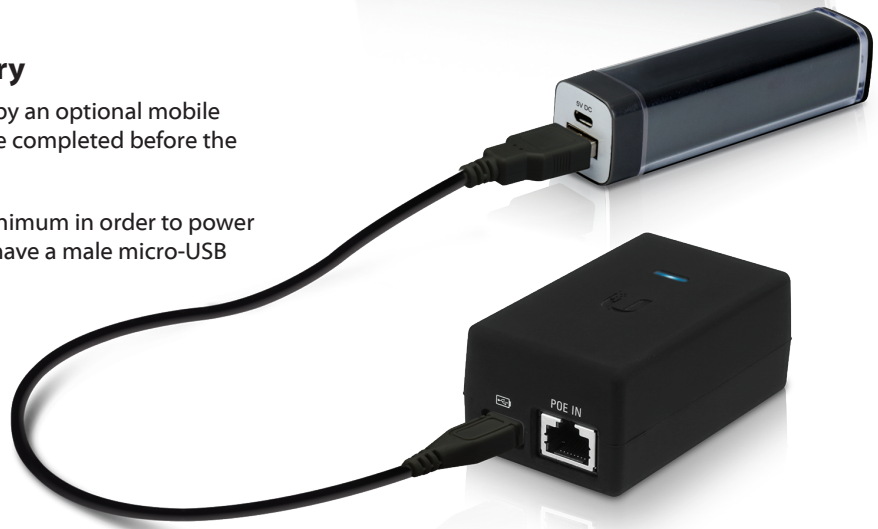

Specifications

airGateway Installer	
Dimensions	47 x 80 x 34 mm (1.86 x 3.15 x 1.34")
Processor	Atheros MIPS 74KC, 560MHz
Memory	32 MB DDR2
Buttons	(1) Reset airGateway (1) Reset External airMAX Device
Networking Interfaces	(3) 10/100 Ethernet Ports, Dual-Band Wi-Fi
Wi-Fi Frequency	2.4 / 5 GHz
Wi-Fi Standards	802.11 a/b/g/n
Power Method	PoE Adapter, 15-24V (Not Included) USB Mobile Battery Pack, 5V, 2A (Not Included)
LED	White, Blue
Operating Temperature	-30 to 70° C (-22 to 158° F)
Operating Humidity	5 to 95% Noncondensing