



## DLB 2-14-TH

Outdoor Wireless Device

# DATASHEET

## Specifications

### Wireless

WLAN standard	IEEE 802.11 b/g/n, iPoll (proprietary)
Radio mode	MIMO 2x2
Radio frequency band	2.4 GHz
Transmit power	Up to 6 * dBm (For Thailand)
Receive sensitivity	Varying between -96 and -74 *dBm depending on modulation
Channel size	5,10, 20, 40 MHz
Modulation schemes	802.11 g/n: OFDM (64-QAM, 16-QAM, QPSK, BPSK) 802.11 b: DSS (CCK, DQPSK, DBPSK)
Data rates	802.11 n: 300, 270, 240, 180, 120, 90, 60, 30 Mbps 802.11 g: 54, 48, 36, 24, 18, 12, 9, 6 Mbps 802.11 b: 11, 5.5, 2, 1 Mbps
Error correction	FEC, Selective ARQ
Duplexing scheme	Time division duplex

### Antenna

Type	Integrated directional dual - polarized panel
Gain	14 *dBi

### Wired

Interface	10/100 Base-T, RJ45
-----------	---------------------

## Software

Wireless operating modes	Access point (auto WDS), access point (iPoll 2), station (WDS, iPoll 2), station (ARP NAT)
Wireless techniques	Smart station polling, smart auto-channel, adaptive auto modulation, automatic transmit power control (ATPC)
Wireless security	WPA/WPA2 personal, WPA/WPA2 enterprise, WACL, user isolation
Wireless QoS	4 queues prioritization on iPoll 2
Network operating modes	Bridge, router IPv4, router IPv6
Network techniques	Routing with and without NAT, VLAN
WAN protocols	Static IP, DHCP client, PPPoE client
Services	DHCP server, SNMP server, NTP client, router advertisement daemon, ping watchdog
Management	HTTP(S) GUI, SSH, SNMP read, WNMS, Telnet
Tools	Site survey, link test, antenna alignment

## Physical

Dimensions (head)	Length 205 mm (8 "), width 205 mm (8 "), height 45 mm (1.7 ")
Weight	Unit: 700 g (24.7 oz)
Power supply	2 - 24 VDC passive PoE (24 V passive PoE adapter is included in the package)
Power source	100 - 240 VAC
Power consumption (max)	4.5 W

## Environmental

Operating temperature	-40°C (-40 F) ~ +65°C (+149 F)
Humidity	0 ~ 90 % (non-condensing)


## Management

System monitoring	SNMP v1/2c/3 server, Syslogs, system alerts via e-mail and SNMP trap
-------------------	--

## Regulatory

Certification	FCC/IC/CE
---------------	-----------

## Antenna specifications

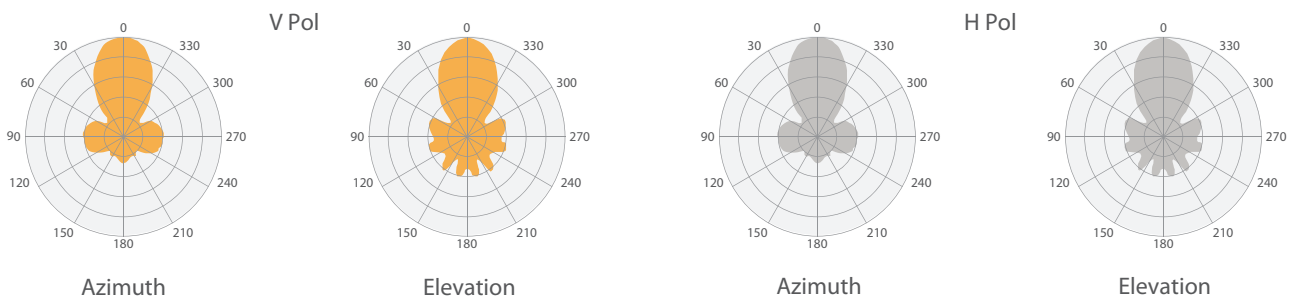

### Internal Antenna

Frequency range	2.4 GHz
Gain	14 *dBi
Polarization	Dual linear
Azimuth beamwidth (H pol)	34 deg
Azimuth beamwidth (V pol)	36 deg
Elevation beamwidth	36 deg